




**CERTIFICATE OF QUALIFICATION VISUAL INSPECTION & ULTRASONIC WALL THICKNESS MEASUREMENT**

THIS REPORT COMPLIES WITH RECOGNIZED INTERNATIONAL STANDARDS & TECHNICAL REQUIREMENTS

|                     |  |                      |                                   |
|---------------------|--|----------------------|-----------------------------------|
| CLIENT:             | <b>HALLIBURTON</b>   | REPORT NO :          | HALL.25-AUG-NDT-HPS-007           |
| LOCATION:           | HPS (Burjesia Halliburton Camp)                                      | SPECIFICATION:       | ASTM E797-21                      |
| INSPECTION DATE:    | Friday, August 8, 2025   | INSPECTION DUE DATE: | <b>Saturday, February 7, 2026</b> |
| TYPE OF INSPECTION: | <b>VISUAL INSPECTION &amp; ULTRASONIC WALL THICKNESS MEASUREMENT</b> |                      |                                   |
| DESCRIPTION:        | <b>ACCUMULATOR BOTTLE</b>  | SERIAL NO:           | <b>18D362012</b>                  |
| UNIT NAME:          | <b>POWER PACK</b>  | UNIT NO:             | <b>12173665</b>                   |

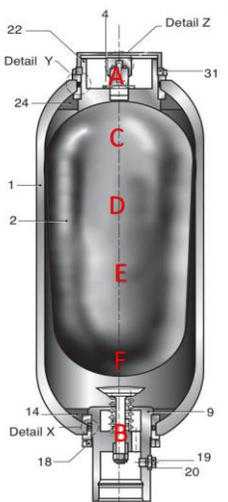

\*\* ALL READINGS IN INCHES  
\*\*MINIMUM THICKNESS PROVIDED BY CUSTMER

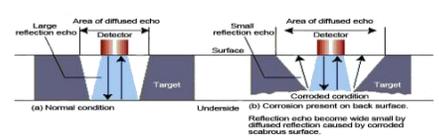

| THICKNESS POINTS AREA | WALL THICKNESS RESULT |       |       | MINIMUM THICKNESS | REMARKS  |
|-----------------------|-----------------------|-------|-------|-------------------|----------|
|                       | 120°                  | 240°  | 360°  |                   |          |
| (TOP HEAD A1 )        | 0.622                 | 0.615 | 0.603 | 0.500 INCH        | ACCEPTED |
| (TOP HEAD A2 )        | 0.626                 | 0.614 | 0.608 |                   |          |
| ( BOTTOM HEAD B1 )    | 0.615                 | 0.620 | 0.614 |                   |          |
| ( BOTTOM HEAD B2 )    | 0.606                 | 0.616 | 0.619 |                   |          |
| (BODY C )             | 0.433                 | 0.441 | 0.435 | 0.300 INCH        |          |
| (BODY D )             | 0.445                 | 0.455 | 0.450 |                   |          |
| (BODY E )             | 0.448                 | 0.453 | 0.462 |                   |          |
| (BODY F )             | 0.439                 | 0.446 | 0.441 |                   |          |

**INSPECTION RESULT**

Visual fully inspected and found freedom from deforms, cracks, corrosion & mechanical damage

**U.T**-The Above Item Was Found Acceptable As Per ASTM E797-21

**INSPECTION EQUIPMENT DETAILS**

|                               |          |              |          |  |
|-------------------------------|----------|--------------|----------|--|
| UT THICKNESS GAUGE:           | 5500391  | CAL DUE DATE | 7-Oct-25 | WHITE LIGHT INTENSITY:<br><br>3570 lux |
| UT TEST BLOCK:                | NoBo5087 | CAL DUE DATE | 8-Oct-25 |  |
| Digital Lux Meter WHITE LIGHT | 2722003  | CAL DUE DATE | 9-Oct-25 |  |

**PERSON DETAILS**

**REVIEW BY**

|                    |                              |                        |                |         |  |
|--------------------|------------------------------|------------------------|----------------|---------|--|
| INSPECTOR NAME:    | M. Shabbid Ahmed             | SENIOR INSPECTOR:      | NAVEED HUSSAIN | CLIENT: |  |
| QUALIFICATION:     | M.S. L. 2. 1. M. S. T. 1. 1. | INSPECTION SUPERVISOR: | HANI ALI       | HB&SIGN |  |
| SIGNATURE & STAMP: |                              |                        |                | DATE:   |  |

