

MAJOR INSPECTION CERIFICATE

THIS REPORT COMPLIES WITH RECOGNIZED INTERNATIONAL STANDARDS & TECHNICAL REQUIEREMENTS

CLIENT:	HALLIBURTON	REPORT No.:	QC-23-12-TSS-003-NDT-MAJ-001
LOCATION:	TSS WORKSHOP & INSPECTION TEST AREA	STANDARD:	ASTM E709 & ASTM E797 & ASME SECTION V ARTICLE 5,10 & 27 & ASME B31.1
WORK ORDER #	325817395	SPECIFICATION:	Halliburton Acceptance Criteria H2S STANDARD NACE MQ-01-77
DATE OF INSP:	29-DEC-2023	INSP. DUE DATE:	ANNUAL INSPECTION
TYPE OF INSPECTION:	VISUAL INSPECTION, PRESSURE TEST AND MAGNETIC PARTICLE INSPECTION AND ULTRASONIC THICKNESS GAUGING		

DESCRIPTION:	SURFACE SAFETY VALVE 3 1/8" 5K	SAP NO #	12011975
MANUFACTURER:	PETROFAC	SERIAL NO:	028974

INSPECTION DETAILS

Max. Working Pressure:	5,000 PSI	Holding Time:	18 Min
Low pressure:	300 PSI	Holding Time:	05 Min
Pump S.N.:	13119220 Cal DUE. AUG.2024	Pressure Gauge NO.:	468066 Cal DUE. AUG.2024

A:12'O CLOCK / FORWARD
B:3'O CLOCK / CENTER
C :6'O CLOCK / AFT

* ALL READINGS IN INCH
**MINIMUM THICKNESS PROVIDED BY CUSTMER

ONLINE TRACEABILITY

POINTS	THICKNESS AT POSITION				MINIMUM THICKNESS		
	SECTION-1 A	SECTION-1 B	SECTION-2	SECTION-3	SECTION-1	SECTION-2	SECTION-3
0°	1.115	1.117	1.567	1.561	0.310	0.940	1.060
90°	1.167	1.089	1.571	1.511	0.310	0.940	1.060
180°	1.059	1.076	1.602	1.543	0.310	0.940	1.060
270°	1.071	1.069	1.578	1.489	0.310	0.940	1.060

INSPECTION RESULT

VT & MPI	Accepted	* ACCORDING TO ASTM E709(70.94158).
UT	Accepted	According to Halliburton Procedure (H2S STANDERD NACE MQ-01-77) ASME SECTION V ARTICLE 5 (ASTM E 797)
BODY	Accepted	*** These Are The Actual Readings Need To Follow As Per Halliburton Acceptance Criteria

Inspection Evaluation

(MPI) The Above Item Has No Significant Discontinuous At The Time Of Inspection And Found Acceptable Accordance To The Halliburton Specification ASTM E709 (70.94158)

U.T-The Above Item Was Found Acceptable As Per Halliburton Procedure H2S STANDARD NACE MQ-01-77 ASME SECTION V ARTICLE 5 (ASTM E 797)

Pressure Test-The Above Item was Pressure Tested up to 300 PSI A low Pressure Hold for 5 min And Maximum Working pressure 5.000 psi Hold 18 min no Leak was Realized while testing & Pressure Was Stable Accordance To Chart Recorder Attached

INSPECTION EQUIPMENT DETAILS

TECHNICAL DETAILS

AC YOKE S.N:	201504048	CAL DUE DATE	14-Feb-24	White Contrast WCP-2	MANUFACTUR E	BATCH NO	EXPIRE DATE
Digital Lux Meter WHITE LIGHT	2722003	CAL DUE DATE	16-Feb-24		Magnaflux	220602	JUN,2025
UT THICKNESS GAUGE:	3997	CAL DUE DATE	16-Feb-24	Black Magnetic Ink 7HF	MANUFAC TURE	BATCH NO	EXPIRE DATE
UT TEST BLOCK:	NoBo5087	CAL DUE DATE	16-Feb-24		Magnaflux	220605	JULY,2025
ASTM Test Block:	1657	CAL DUE DATE	14-Feb-24	Fluorescent Magnetic Ink 7HF	1.2 to 2.4 ml/100 ml		
WHITE LIGHT INTENSITY:	3580 lux						

PERSON DETAILS


INSPECTOR NAME:	M. Shahzad Ahmed	SENIOR INSPECTOR:	NAVEED HUSSAIN	CLIENT:	
QUALIFICATION:	S. I. I.	INSPECTION SUPERVISOR:	HANI ALI	HB&SIGN	
SIGNATURE & STAMP:				DATE:	

Data Collection Report

Gauge Information	
Serial Number	468066
Model	XP2I
Message Store	TSS test area
Units	PSI
SCALE	15000 PSI

Run Info	
Start Time	9:25 AM
Stop Time	9:48 AM
Test Date	29-Dec-23
EQ NUMBER	12011975
LAST CALIB	2.Aug.2023

READING

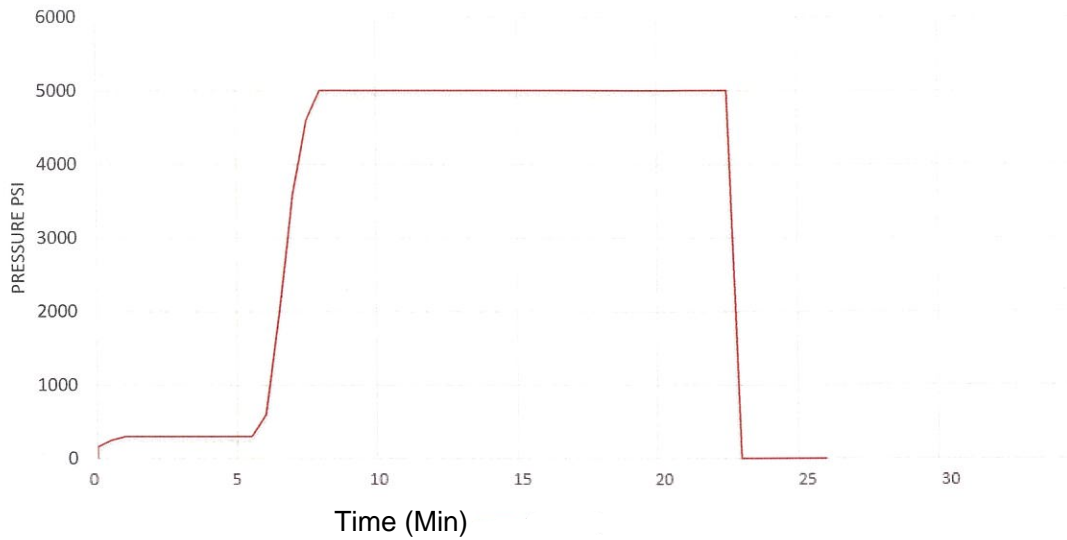

TESTED BY : Haider Emad
APPROVED BY: Hassan Kamel
COMMENTS: Downstream

SIGN: 

SIGN: 




Data Collection Report

Gauge Information	
Serial Number	468066
Model	XP2I
Message Store	TSS test area
Units	PSI
SCALE	15000 PSI

Run Info	
Start Time	8:30 AM
Stop Time	8:52 AM
Test Date	29-Dec-23
EQ NUMBER	12011975
LAST CALIB	2.Aug.2023

READING

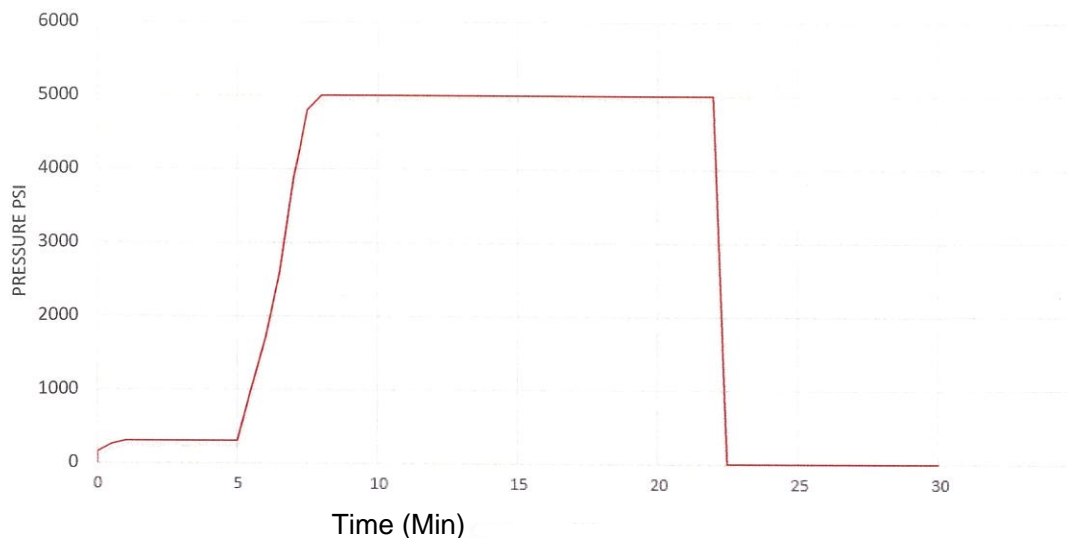

TESTED BY : Haider Emad
APPROVED BY: Hassan Kamel
COMMENTS: Body Test

SIGN:

SIGN:




Data Collection Report


Gauge Information	
Serial Number	468066
Model	XP2I
Message Store	TSS test area
Units	PSI
SCALE	15000 PSI

Run Info	
Start Time	8:57 AM
Stop Time	9:19 AM
Test Date	29-Dec-23
EQ NUMBER	12011975
LAST CALIB	2.Aug.2023

READING

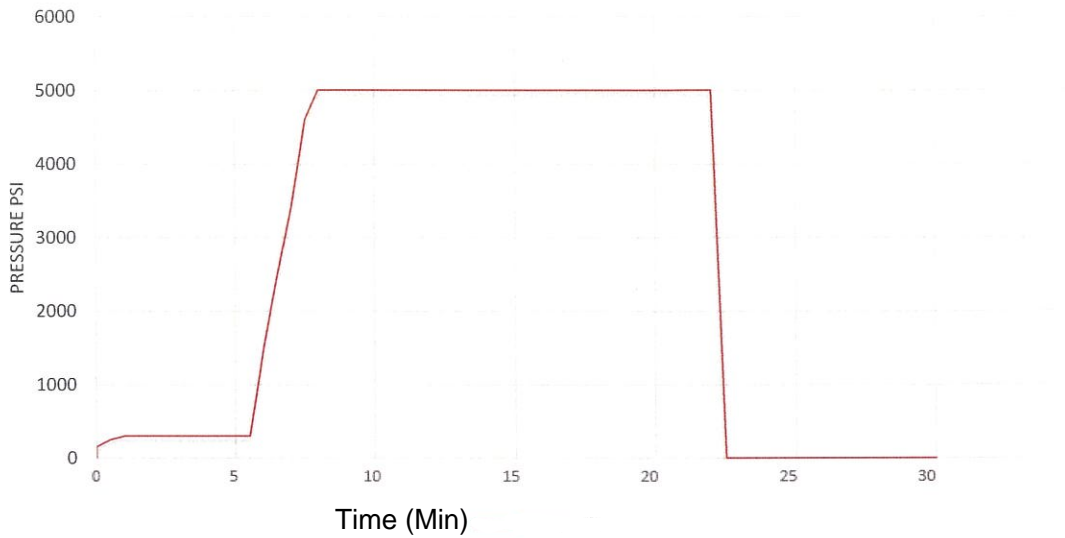

TESTED BY : Tarek Bekhit
APPROVED BY: Hassan Kamel
COMMENTS: Upstream

SIGN: 
SIGN: 