






Visual & Magnetic Particles & Ultrasonic Thickness Gauging Report

Client:	Daqing Drilling Company	Certificate no:	QC-B-03-25-0087-11
Location:	DQ-011	Job Order No:	QC-B-03-25-0087
Date of Examination:	13-3-2025	Next Inspection Due:	12-9-2025

Serial Number	Description of the examined equipment	Result
R011-001	S Pipe	Accepted

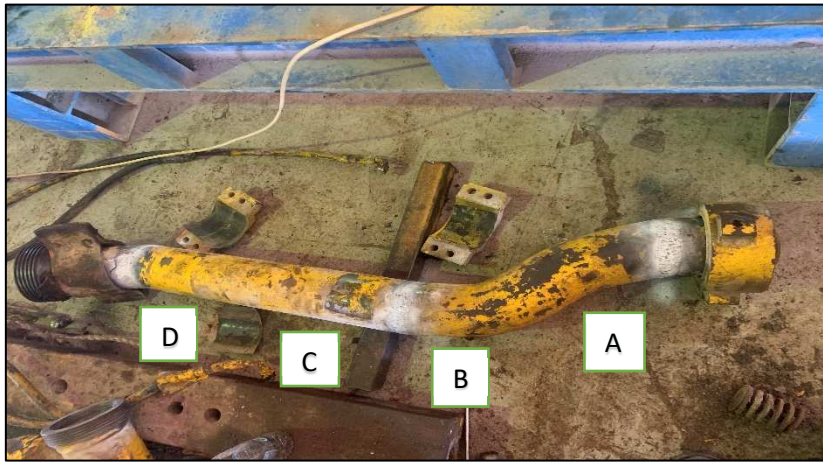

A:12'O CLOCK / FORWARD
B:3'O CLOCK / CENTER
C:6'O CLOCK / AFT

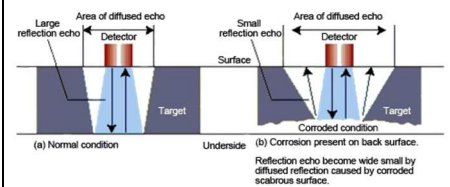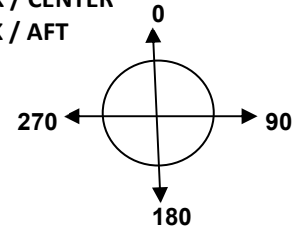

ANGLES	UT WALL THICKNESS POSITION MEASURED IN MM								MINIMUM THICKNESS
	A	B	C	D	E	F	G	H	
0°	24.50	23.09	25.01	23.98	--	--	--	--	
90°	25.11	24.34	24.76	23.88	--	--	--	--	
180°	23.95	24.94	24.45	24.23	--	--	--	--	
270°	24.13	25.03	24.87	24.10	--	--	--	--	

Equipment Details

Standard	ASTM E797 / ASTM E709	Specification:	H.H OEM Data Book	Method	WET
Yoke	Permanent	Serial No:	PY-09	Due Date	11. May.2025
White Contrast	WCP-2	Batch No:	008A009	Due Date	April.2026
Black Ink	7HF	Batch No:	008A103	Due Date	Jun.2026
Ultrasonic Thickness Meter	UT-1	Serial No:	5202746	Due Date	15-7-2025

INSPECTION EVALUATION

During UT all the readings are within the tolerance and accepted according to the abovementioned specification.

Visual and MPI were carried out for the above description and found free of surface defects at the time of inspection

Identification of any part found to have a defect and a description of the defect:

Remarks: Minimum of Wall thickness Provided By H.H OEM


LEEA & ASNT Level II Inspector Name:	Signature:	Authenticating This Report:	Signature:
Mohamed Magdy		Mohamed Abdulla	





Visual & Magnetic Particles & Ultrasonic Thickness Gauging Report

Client:	Daqing Drilling Company	Certificate no:	QC-B-03-25-0087-11
Location:	DQ-011	Job Order No:	QC-B-03-25-0087
Date of Examination:	13-3-2025	Next Inspection Due:	12-9-2025

Serial Number	Description of the examined equipment	Result
R011-002	Goose Neck	Accepted

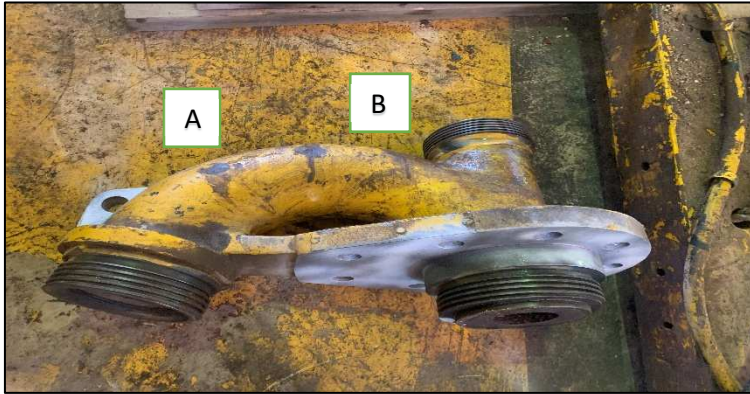

A:12'O CLOCK / FORWARD
B:3'O CLOCK / CENTER
C:6'O CLOCK / AFT

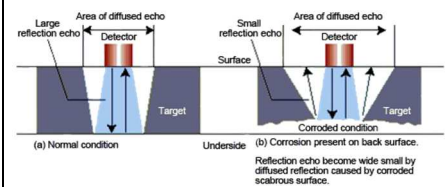

ANGLES	UT WALL THICKNESS POSITION MEASURED IN MM								MINIMUM THICKNESS
	A	B	C	D	E	F	G	H	
0°	25.54	25.29	24.56	--	--	--	--	--	
90°	24.72	24.47	24.73	--	--	--	--	--	
180°	24.33	25.16	24.88	--	--	--	--	--	
270°	24.01	25.15	25.09	--	--	--	--	--	

Equipment Details

Standard	ASTM E797 / ASTM E709	Specification:	H.H OEM Data Book	Method	WET
Yoke	Permanent	Serial No:	PY-09	Due Date	11. May.2025
White Contrast	WCP-2	Batch No:	008A009	Due Date	April.2026
Black Ink	7HF	Batch No:	008A103	Due Date	Jun.2026
Ultrasonic Thickness Meter	UT-1	Serial No:	5202746	Due Date	15-7-2025

INSPECTION EVALUATION

During UT all the readings are within the tolerance and accepted according to the abovementioned specification.

Visual and MPI were carried out for the above description and found free of surface defects at the time of inspection

Identification of any part found to have a defect and a description of the defect:

Remarks: Minimum of Wall thickness Provided By H.H OEM

LEEA & ASNT Level II Inspector Name:	Signature:	Authenticating This Report:	Signature:
Mohamed Magdy		Mohamed Abdulla	