


MPI & Wall Thickness Inspection Certificate

Client:	SLB BASRA	Report No:	QC-SLB-25177-30
Work Location:	WIRE LINE WORK SHOP	Date Of Inspection:	12/AUG/2025
Reference:	Customer spec ASTM E797+E709	Next Inspection Date:	11/FEB/2026

Specification:	☐ API ☐ DS1 ☒ Customer spec ☐ Other	
Inspection method:	☒ MPI ☐ Wet ☐ Dry ☐ Dye Penetrant ☐ VTI ☒ Ultrasonic wall thickness spot test ☐ Others	
Equipment used:	☐ UVB light ☐ AC yoke ☐ DC coil ☒ Ultrasonic T.G. ☐ Other	

Material Inspected:	TOOL CATCHER 4"	UPPER OD:	2.88 Inch	LOWER OD:	5.12	ID:	4 Inch
---------------------	------------------------	-----------	-----------	-----------	------	-----	--------

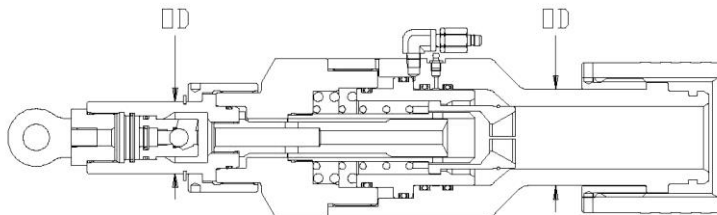

Serial No.	Ultrasonic Thickness Measurements				Minimum Thickness
EME15C006					
TC LOWER BODY	0.611 in	0.623 in	0.631 in	0.621 in	0.506 in
TC TOP ADAPTER	0.450 in	0.453 in	0.451 in	0.450 in	As per costumer

Inspection Evaluation:	U.T	During All The Reading Are Within The Tolerance And Accepted Min Thickness According to Schlumberger Reference.
------------------------	-----	---

Inspection Equipment Details:	U.T Wall Thickness	Serial No	5202746	Cal Date	23.Aug.2025
-------------------------------	--------------------	-----------	---------	----------	-------------

Min = Minimal W. T	TE=Thread Elongation	CO= Corrosion	W = Washout	M = Flat spot / Wash	SD= shoulder Damage
--------------------	----------------------	---------------	-------------	----------------------	---------------------

SUPERVISOR	M-TAREK	Inspector:	M-SHAHZAD
------------	----------------	------------	------------------

