


Wall Thickness (UT) Inspection Certificate

Client:	SLB Basra	Report No:	QC-SLB-25249-41
Work Location:	WIRE LINE WORKSHOP UNIT# 001M	Date Of Inspection:	30/Sep/2025
Reference:	Customer spec ASTM E797	Next Inspection Date:	29/Mar/2026

Specification:	☐ API ☐ DS1 ☒ Customer spec ☐ Other	
Inspection method:	☒ MPI ☐ Wet ☐ Dry ☐ Dye Penetrant ☐ VTI ☒ Ultrasonic wall thickness spot test ☐ Others	
Equipment used:	☐ UVB light ☐ AC yoke ☐ DC coil ☒ Ultrasonic T.G. ☐ Other	

Material Inspected:	PUMP IN SUB 7"	OD:	8.500 Inch	ID:	7 Inch
----------------------------	-----------------------	------------	------------	------------	--------

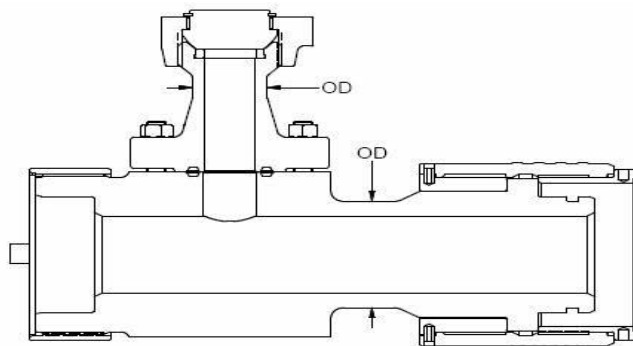

Serial No.	Ultrasonic Thickness Measurements				Minimum Thickness
EUK18A010					
BODY	1.071 in	1.070 in	1.078 in	1.076 in	0.896 in

Inspection Evaluation:	U.T	During All The Reading Are Within The Tolerance And Accepted Min Thickness According to Schlumberger Reference.
-------------------------------	-----	---

Inspection Equipment Details:	U.T Wall Thickness	Serial No	14526	Cal Date	22.Feb.2025
--------------------------------------	--------------------	-----------	-------	----------	-------------

Min = Minimal W. T	TE=Thread Elongation	CO= Corrosion	W = Washout	M = Flat spot / Mash	SD= shoulder Damage
--------------------	----------------------	---------------	-------------	----------------------	---------------------

SUPERVISOR	M-TAREK	Inspection Engineer:	M-SHAHZAD
-------------------	----------------	-----------------------------	------------------

