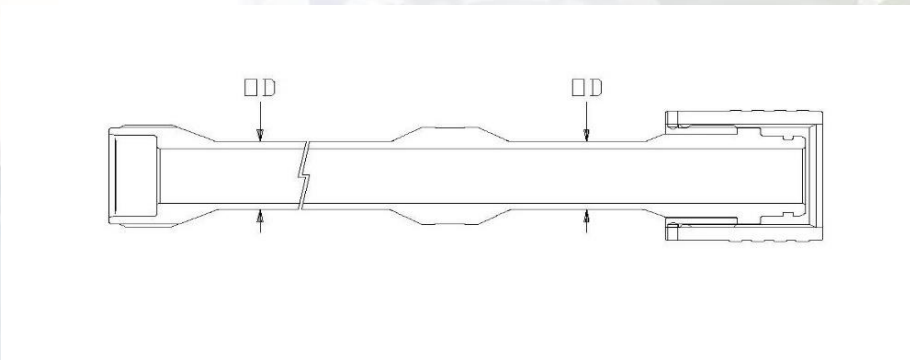


MPI & UT. Wall Thickness Gauging Inspection Certificate

Client:	SLB BASRA		Report No:	QC-SLB-25264-24	
Work Location:	COILTUBING WORK SHOP		Date of Inspection:	31/Oct/2025	
Reference:	ASTM E 797 & ASTM E 709		Next Inspection Date:	30/Apr/2026	
Specification:	☐ API ☐ DS1 ☒ Customer spec ☐ Other				
Inspection method :	☒ MPI ☐ Wet ☐ Dry ☐ Dye Penetrant ☐ VTI ☐ Dimensional check ☒ Ultrasonic wall thickness spot test ☐ Others				
Equipment used :	☐ UVB light ☐ AC yoke ☐ DC coil ☒ Ultrasonic T.G. ☐ Other				
Material Inspected:	6 FT/4" RAISER				
					
Serial No.	Ultrasonic Thickness Measurements				Minimum Thickness
	A	B	C	D	
152-48071	0.811 in	0.815 in	0.810 in	0.801 in	Accept by customer
Inspection Evaluation:	U.T	During The Time of Inspection, All The Readings Are Within The Tolerance and Accepted By SLB Requirements:			
	MPI	The Above Mentioned Item Was Inspected by MPI and Found Free of Defects (No Cracks) Found At The Time of Inspection:			
Inspection Equipment Details:	U.T Wall Thickness	Serial No	5202746	Cal Date	22/Feb/2026
Min = Minimal W.T	TE=Thread Elongation	CO= Corrosion	W = Washout	M = Flat spot / Mash	SD= shoulder Damage
SUPERVISOR:	M.TAREK	Inspection Engineer:			