


MPI & UT. Wall Thickness Gauge Inspection Certificate

Client:	SLB BASRA	Report No:	QC-SLB-25264-25
Work Location:	COILTUBING WORKSHOP	Date of Inspection:	31/Oct/2025
Reference:	ASTM E 797 & ASTM E 709	Next Inspection Date:	30/Apr/2026

Specification:	☐ API ☐ DS1 ☒ Customer spec ☐ Other
Inspection method :	☒ MPI ☐ Wet ☐ Dry ☐ Dye Penetrant ☐ VTI ☐ Dimensional check ☒ Ultrasonic wall thickness spot test ☐ Others
Equipment used :	☐ UVB light ☐ AC yoke ☐ DC coil ☒ Ultrasonic T.G. ☐ Other

Material Inspected:	RAISER (10K) 6 FT
---------------------	--------------------------

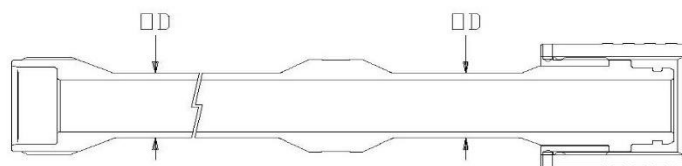

Serial No.	Ultrasonic Thickness Measurements				Minimum Thickness
	A				
152-47787	0.824 in	0.821 in	0.830 in	0.827 in	Accept by customer

Inspection Evaluation:	U.T	During the Time of Inspection All the Readings Are Within the Tolerance and Accepted By SLB Requirement
	MPI	The above mentioned item was inspected MPI and found free of defects (No Crack's) found at the time of inspection.

Inspection Equipment Details:	U.T Wall Thickness	Serial No	5202746	Cal Date	22/Feb/2026
-------------------------------	--------------------	-----------	---------	----------	-------------

Min = Minimal W.T	TE=Thread Elongation	CO= Corrosion	W = Washout	M = Flat spot / Mash	SD= shoulder Damage
-------------------	----------------------	---------------	-------------	----------------------	---------------------

SUPERVISOR	M.TAREK	Inspection Engineer	M-SHAHZAD
------------	----------------	---------------------	------------------

